

HY 115

only 60Hz


HY 230

HYSTREAM 115

HYSTREAM 230

50-60 Hz

3-stage

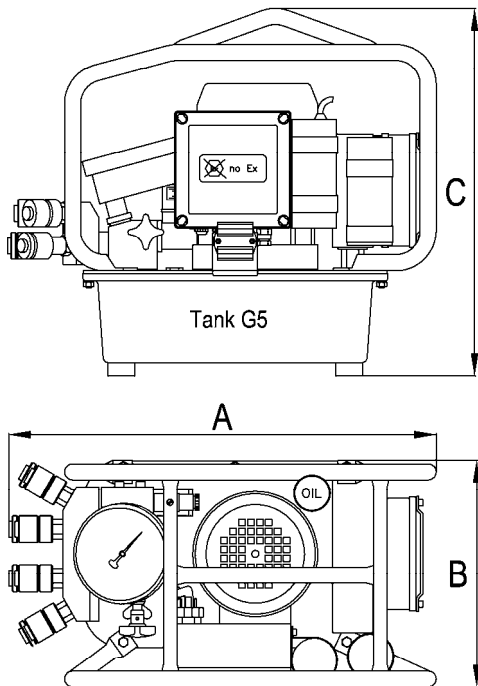

Requirement / Spannung :

HY 115: 1Ph 75-125 / 60Hz

HYSTREAM 115: 1Ph 100-115V / 50-60Hz

HY 230: 1Ph 200-230V / 50-60Hz

HYSTREAM 230: 1Ph 200-230V / 50-60Hz

Power / Leistung :

115V: 1,2 kW / 1,6 HP – 15 Ampere

200-230V: 1.2 - 1.5 kW / 1.6 HP – 7 Amp

Dimensions / Abmessungen:

A = 18,8" (480 mm)

B = 9,8" (250 mm)

C = 16,1" (410 mm)

Weight / Gewicht:

~57 lbs (26 kg) – without oil

General with:

Oil Cooler

Gauge psi/bar FS 1% (KI 1.0)

Remote control 24V – 15 ft (5 m) length

4-Tool-Adapter

Tank G5: volume = 1,35 Gal (5 Ltr.)

Option:

Semi-automatic (-A)

Full-automatic (-FA1)

Calibrated gauge with certificate

Remote control 24V – 30 ft (10 m) length

Docum. –System (-DOC)

Tank G8: volume = 2,1 Gal (8 Ltr.)

Specifications:

(not HY115)

50Hz

60Hz

Max. oil flow: 510 cu.in./min. (8,0 l/min.)
1000 psi (70 bar)

620 cu.in./min. (10 l/min.)

Middlepressure oil flow: 100 cu.in./min. (1,6 l/min.)
4 000 psi (300 bar)

120 cu.in./min. (2,0 l/min.)

Highpressure oil flow: 55 cu.in./min. (0,9 l/min.)
10 000 psi (700 bar)

65 cu.in./min. (1,1 l/min.)